

# CLOVER



All-in-one POS series



## CLOVER 6800


- Fan-Less configuration for Silence
- RAM 1GB
- Android OS Ver. 5.1.1(Lollipop)
- Storage 8 GB eMMC
- 58mm thermal printer equipped
- 10.1"(1280x800) LCD with Capacitive Touch
- Reliability with easy maintenance and Service
- CPU Freescale Coretex-A9 Dual Core Lite @1.2GHz iMX6
- available wall mounting (VESA standard 100mm x 100mm)



Specification	Standard	
CPU	Freescale iMX6 Coretex-A9 Dual Core Lite @1.2GHz	
System Memory	1GB DDR3 RAM	
System Flash	128MB NAND Flash for storage memory/boot	
System Storage	8GB eMMC	
Wi-Fi/Bluetooth	Wi-Fi 802.11 b/g/n, Bluetooth 4.0.	
Interface	Audio	1x Audio in/out
	Ether LAN	1x RJ-45 port
	USB	3x (2x Back + 1 Side USB Ports) USB 2.0 HOST type-A sockets
	USB OTG	1x USB OTG port(Mini USB type-Bsocket)
	DRAWER	1x RJ-11 port
	SERIAL	2x RS-232 port(Male with +5V power)
	HDMI	1x HDMI port(Horizontal HDMI socket)
	SD CARD	1x SD CARD slot(Up to 32GB)
Power supply	AC-Adaptor	
Display size	10.1" (1280x800) LCD with Capacitive Touch	
OS compliant	Android 5.1.1(Lollipop)	
Printer	SII CAPD 245	SII LTP01-245
Printing method	Thermal line dot	Thermal line dot
Resolution	8 dots/mm, 384 dots/line	8 dots/mm, 384 dots/line
Paper roll size	58 mm, max. Ø 60 mm	58 mm, max. Ø 60 mm
Printing width	48mm	48mm
Max Speed	100 mm/sec.	75 mm/sec.
Cutter	Automatic	Manual cut
Printer head life	More than 50 km	More than 50 km
Cutter life	More than 0.5 million cuts	
Customer display	LCD 240 x 48 dot matrix(Back light Green)	
Operating Temperature	0 ~ 40℃	
Dimensions	265(W)x270(D)x75(H)mm	
Weight	1.8kg	
Optional items	Cash Drawer, Operational battery(7.4V/6000mAH), I-Button Reader	



Slim design

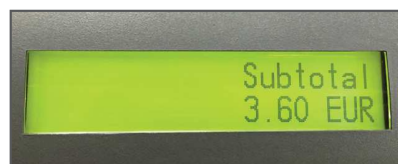

Customer display



Interface



Touch panel display



Printer



VESA mount(100mm×100mm)

**CLOVER**

CLOVER ELECTRONICS Co., LTD.  
306-1AKENO.OBATA.ISE.MIE.JAPAN.  
TEL : 0596-37-5151 FAX : 0596-37-0808