

CLOVER

All in One POS terminal
with Modern Slim Stylish housing design.



- Fan-Less configuration for Silence
- Reliability with easy maintenance and Service
- Windows 10
- System memory: 4GB
- Storage: 64 GB SSD M.2 2242
- 58mm thermal printer equipped
- 10.1"(1280x800) LCD with Capacitive Touch
- SoC : Apollo Lake 4-core Pentium N4200
- available wall mounting (VESA standard 100mm x 100mm)

CLOVER 6800WIN


All-in-one POS series



Slim design



Touch panel display

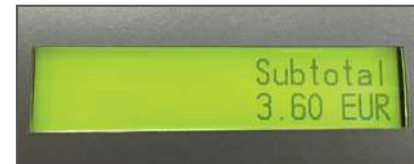


Customer display



Printer



Interface

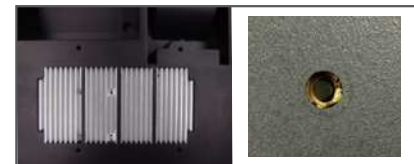

VESA mount(100mm×100mm)

CLOVER 6800WIN

All-in-one POS series

Specification	Standard	
SoC	Apollo Lake 4-core Pentium N4200 is standard. *2-core Celeron N3350 can be option(subject to MOQ)	
System Memory	4GB is standard/ there are 2 memory slots *Different size can be installed(8GB max).	
Storage	64 GB SSD M.2 2242 socket is standard. *Different size can be installed.	
Wi-Fi/Bluetooth	Wi-Fi 802.11 b/g/n, Bluetooth 4.0.	
Interface	USB Port	4 X (2X Back + 2 Side) USB 3.0 HOST type A-sockets 2 X USB2.0 internally
	Serial Port	2 X RS-232 port(Male with +5V power)
	Ether Lan	1 X RJ-45 port(Giga LAN)
	Cash Drawer Port	1 X RJ-11 port(9 voltage)
	DC Jack	1 X DC Jack
	Audio Jack	1 X Audio In/Out
	HDMI	1 X HDMI port(Horizontal)
	SD CARD	1 X SD CARD slot
	SIM CARD	1 X Micro SIM CARD slot
Power supply	AC-Adaptor	
Display size	10.1 "(1280 x 800) LCD with Capacitive Touch panel	
OS Installed	Windows® 10 Enterprise 2016 LTSC	
OS Supported	Windows® 8, Windows® 8.1, Windows® 10	
Printer	SII CAPD245	
Printing method	Thermal line dot	
Resolution	8 dots/mm , 384 dots/line	
Paper roll size	58mm, max.Ø60mm	
Printing width	48mm	
Max Speed	100mm/sec	
Cutter	Automatic	
Printer head life	More than 50km	
Cutter life	More than 0.5million cuts	
Customer Display	LCD 240x 48 dot matrix(Back light Green)	
Dimensions	265(W) x 270(D) x 75(H)mm	
Weight	1.8kg	
Optional items	Cash Drawer, I-Button Reader	